


37


1/6

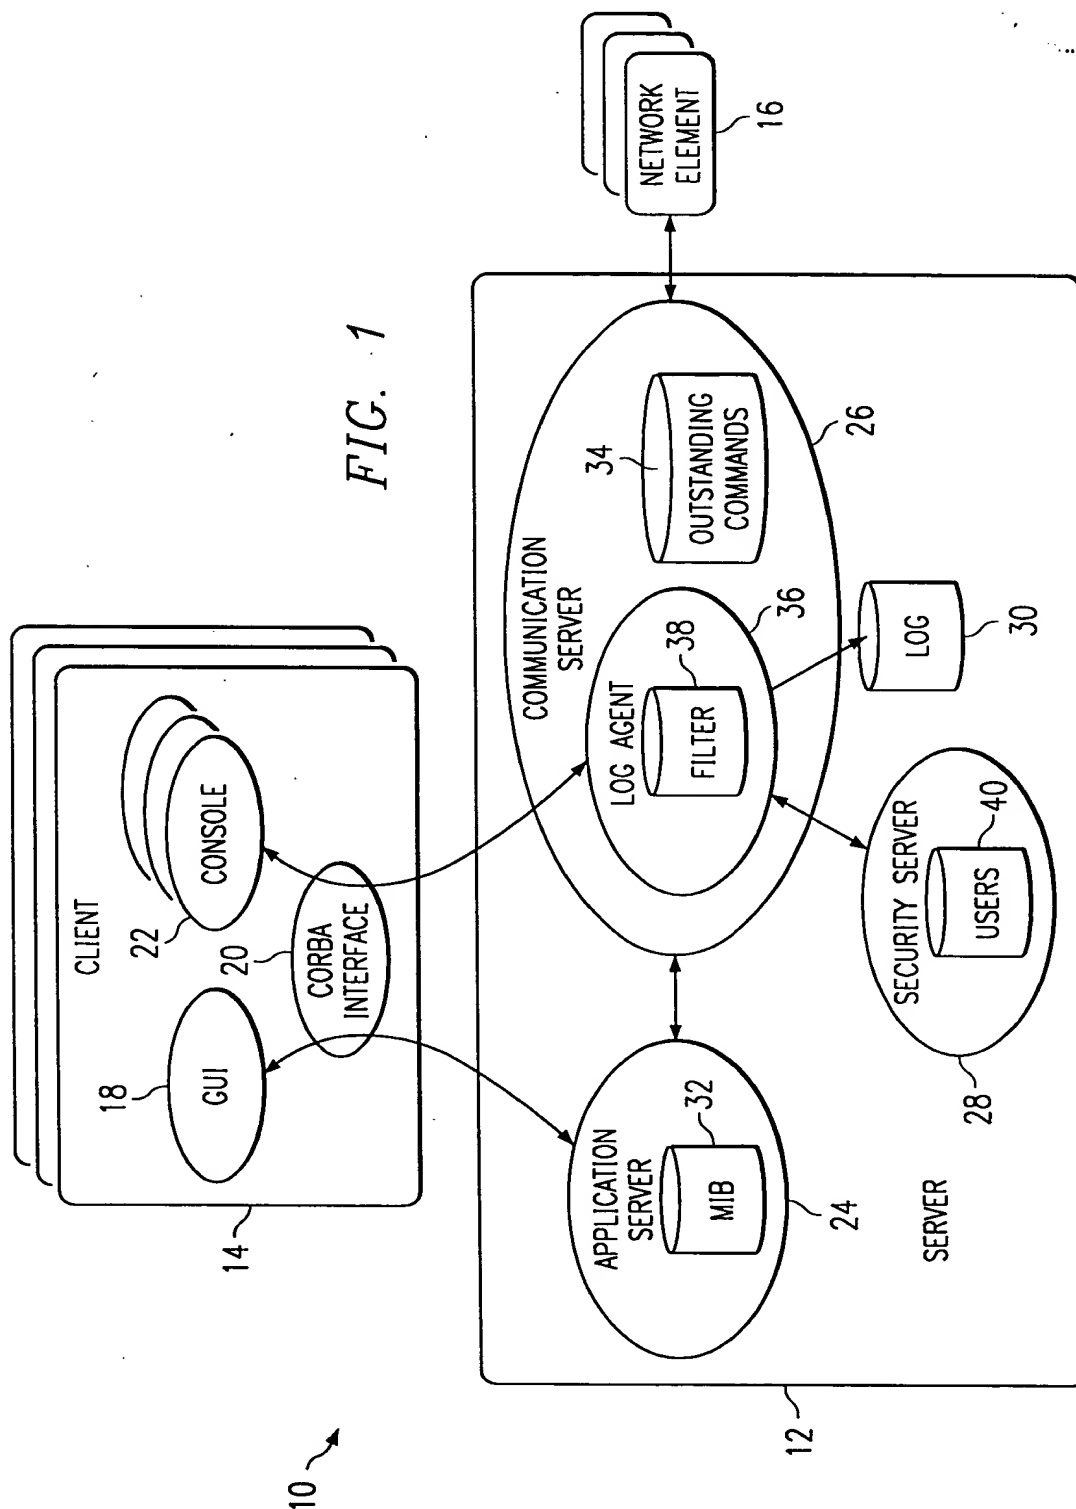

2/6

22

FIG. 2

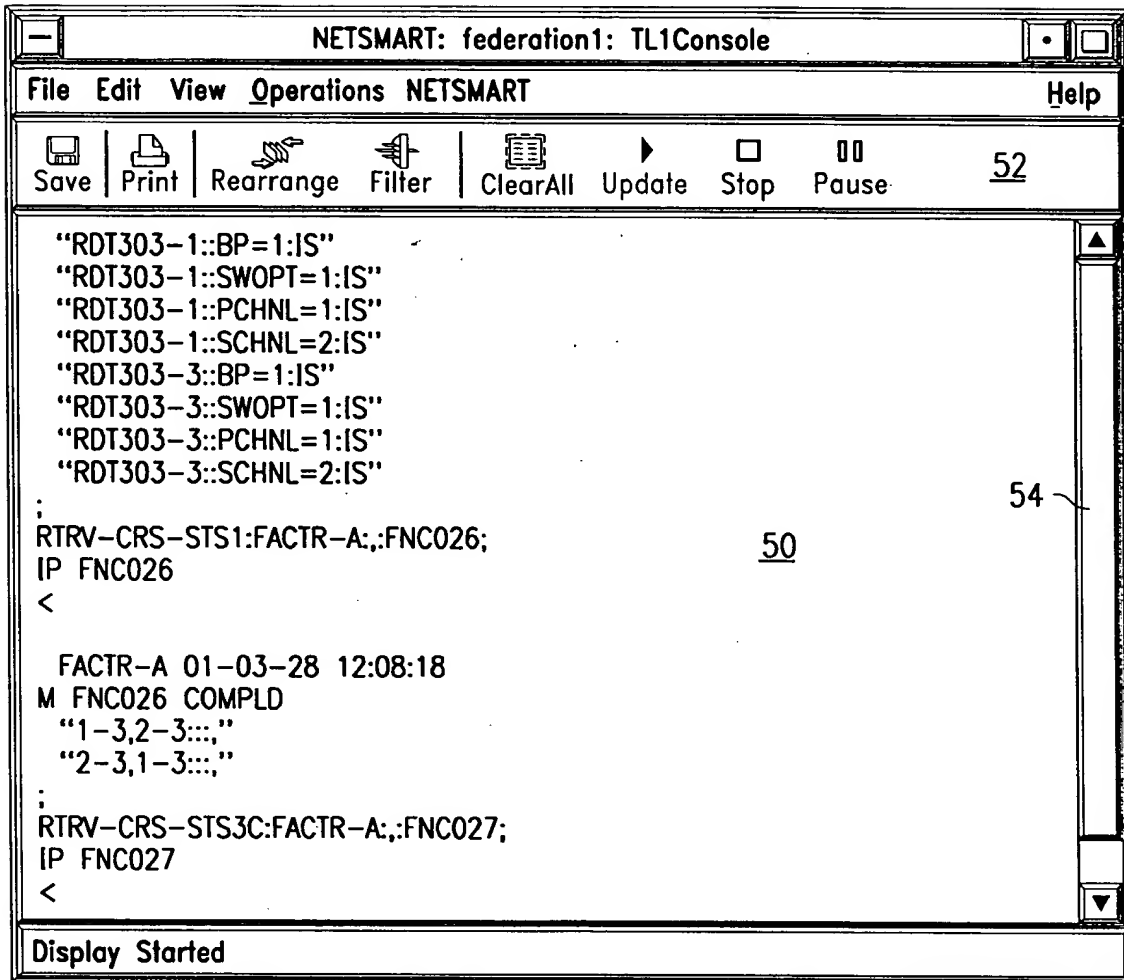

09824997.081501

3/6

60

FIG. 3

A dialog box titled "Filter TL1Event". It contains a "Find NE ID" section with a dropdown menu set to "Starts With", a "Value" text field containing "64", and a checked "Case Sensitive" checkbox. Below this is an "Event Types" section with a grid of checkboxes: "Unparsed", "Received Raw", "Response", "Send Raw", "Command", "Autonomous", and "Acknowledgement", all of which are checked. At the bottom are five buttons: "OK", "Cancel", "Select All", "Clear All", and "Help".


70

FIG. 4

A dialog box titled "TL1 Console Rearrange Attributes". It features two lists: "Attribute List" (labeled 72) containing "Parsable", "TL1Type", "UserName", "TimeStamp", "MsgID", and "NEID"; and "Selected List" (labeled 74) containing "TL1Msg". Between the lists are four buttons: "Add", "Add All", "Remove", and "Remove All". To the right of the "Selected List" are two buttons: "Go Up" (labeled 76) and "Go Down" (labeled 78). At the bottom are three buttons: "OK", "Cancel", and "Help".


4/6

FIG. 5

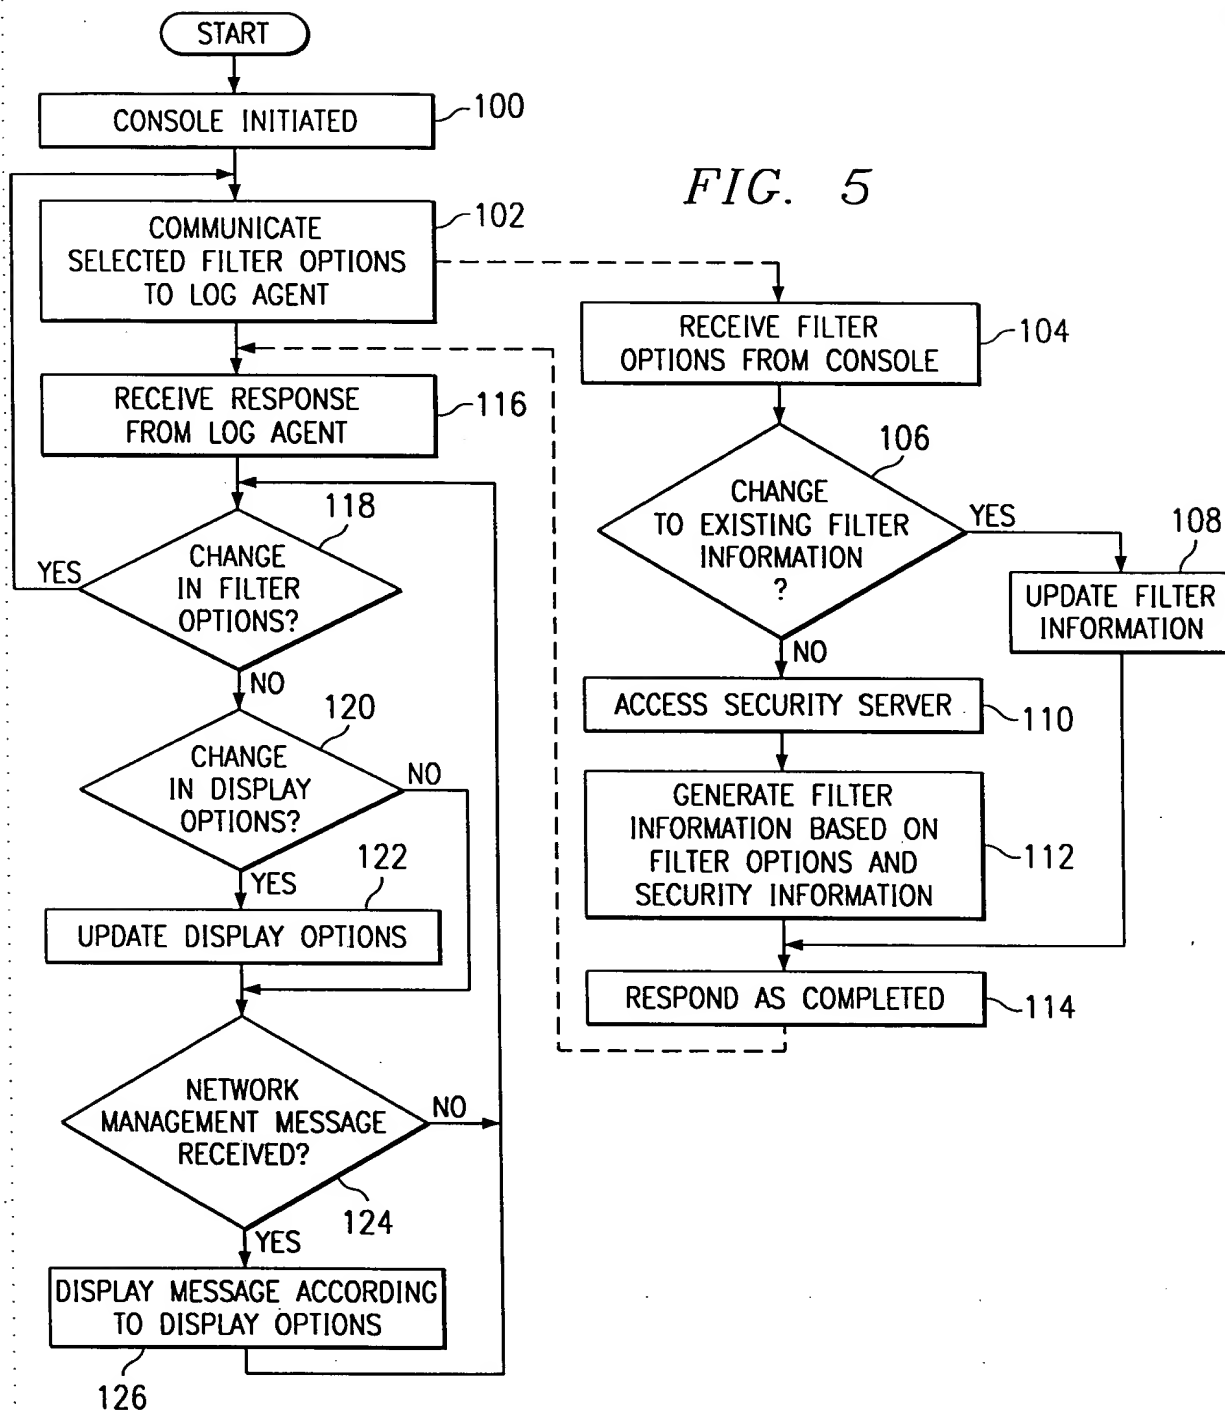


5/6

FIG. 6

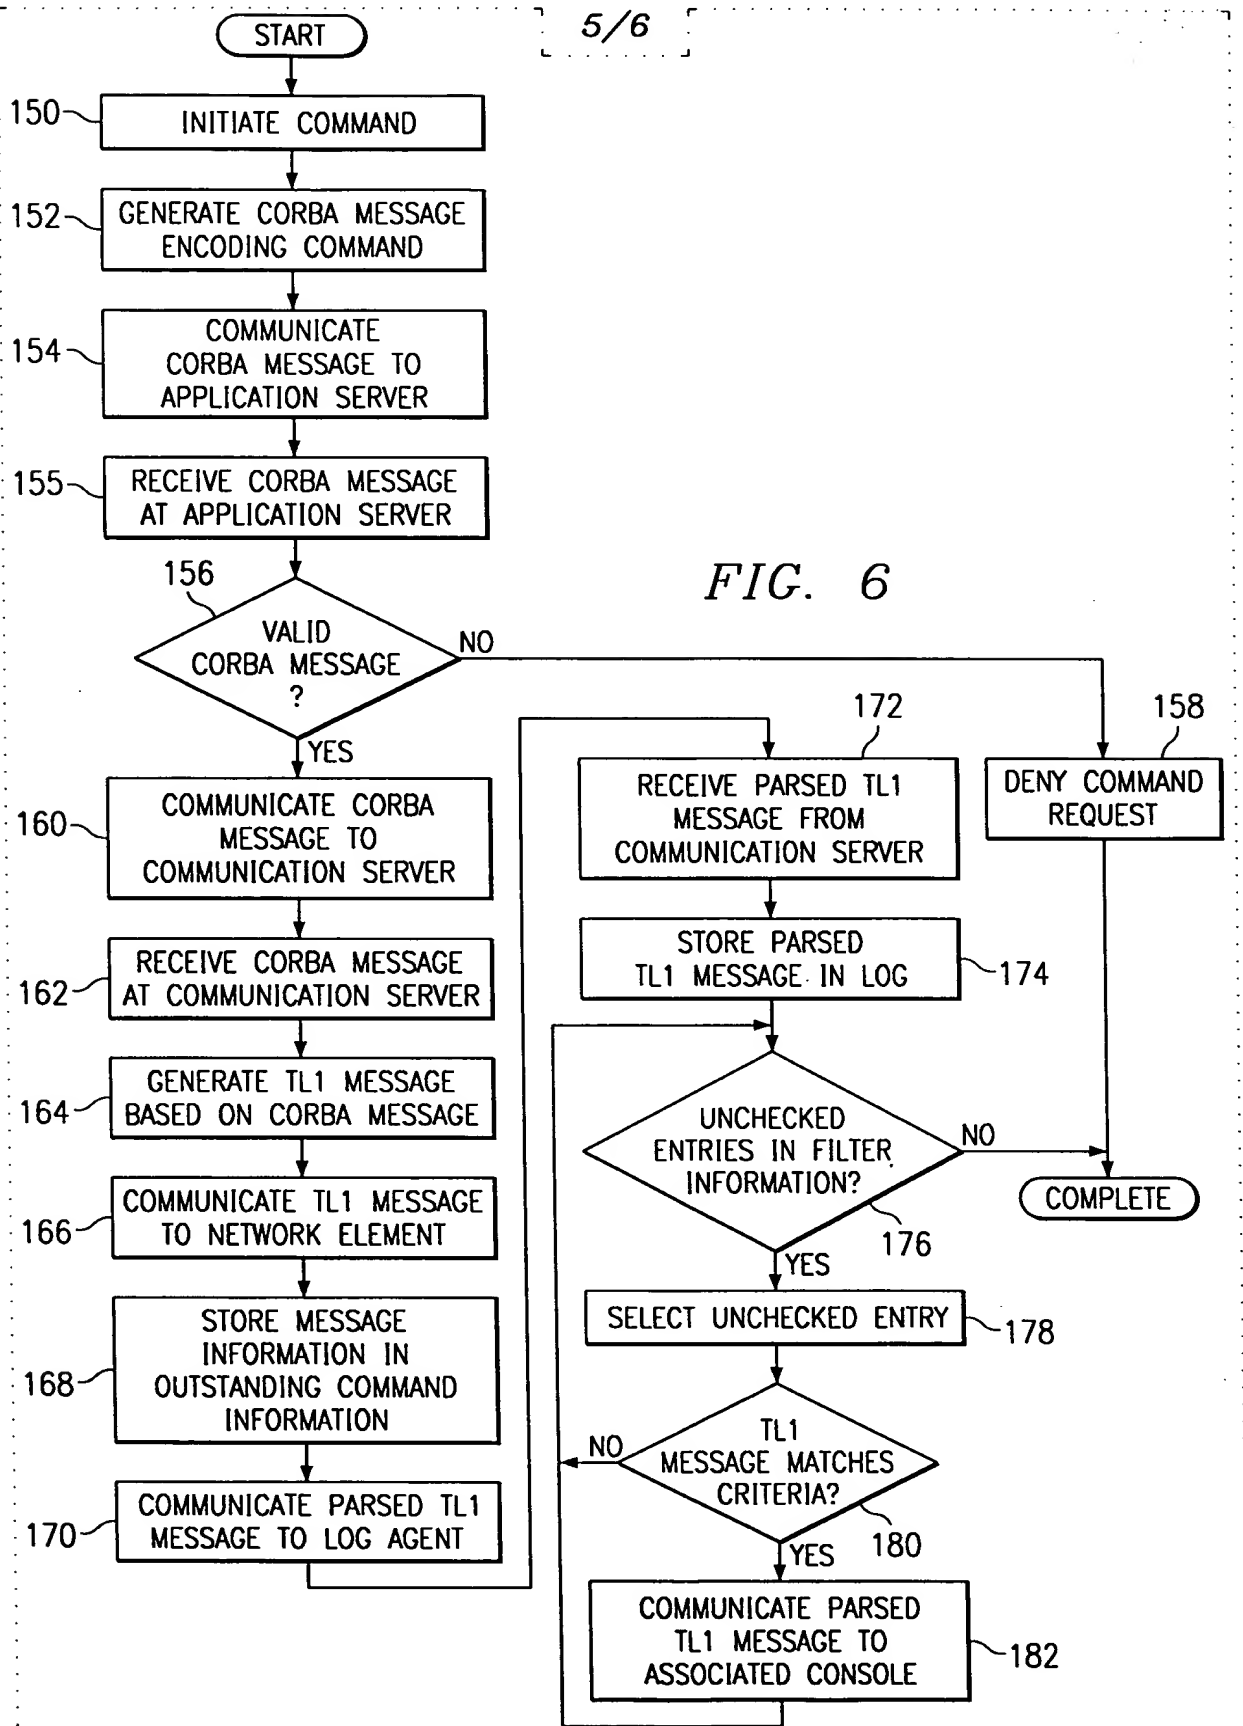

09824997-081601

6/6

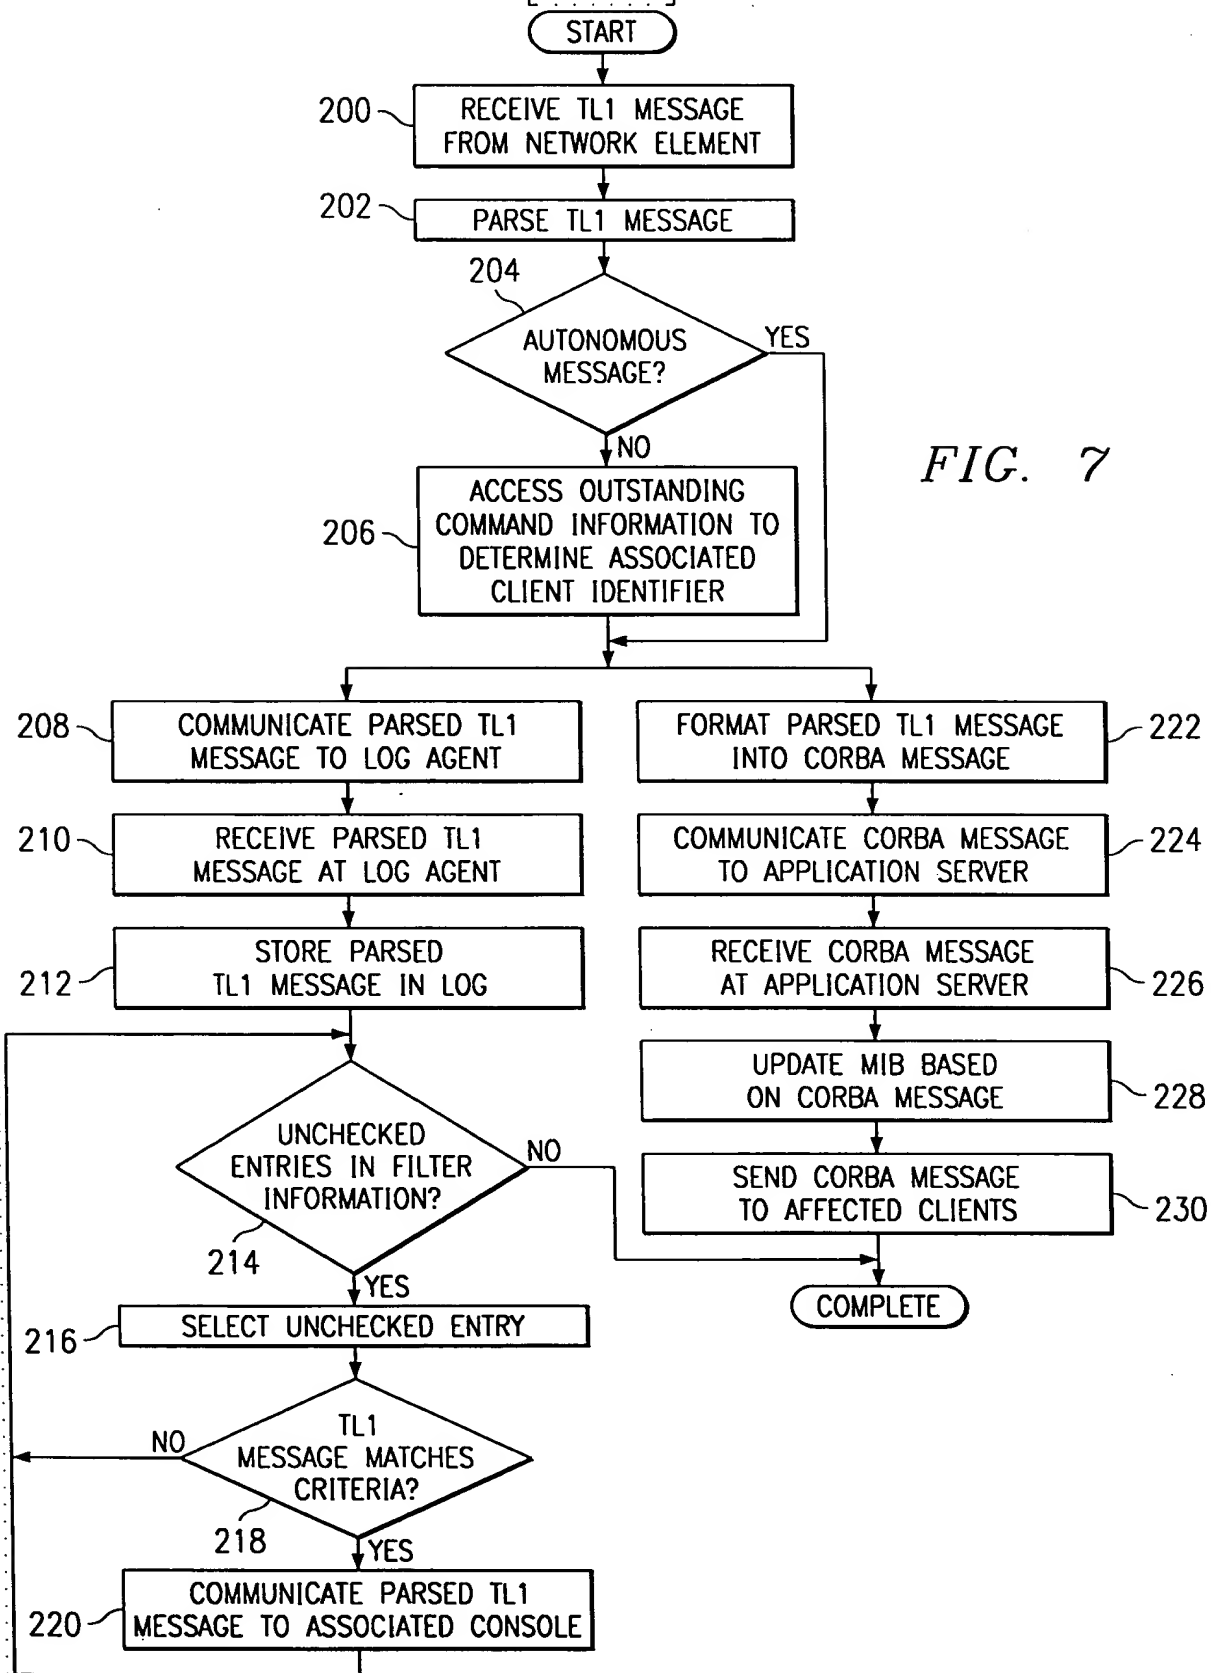

098497-081E01